

LAB REFRIGERATOR & FREEZER



4±1°C Blood Bank Refrigerators
【P01-06】



2°C to 8°C Refrigerator
【P07-22】



0°C to -25°C Freezers
【P23-28】



-40°C Low Temp Freezers
【P29-30】



-80°C ULT Chest Freezers
【P31-34】



-86°C ULT Freezers
【P35-46】

GUANGZHOU MAX LABORATORY EQUIPMENT CO.,LTD.
广州麦克斯实验设备有限公司

REFRIGERATOR & FREEZER



GUANGZHOU MAX LABORATORY EQUIPMENT CO.,LTD.

Add: Room C202, 2nd Floor, No. 97, Gaopu Road, Tianhe District, Guangzhou

Tel: +86 020-38813936

Fax: +86 020-38813936

Phone/WhatsApp/Wechat: +86 132 4232 3168

E-mail: ada@maxlabfurniture.com

Website: www.maxlabfurniture.com

4±1°C BLOOD BANK REFRIGERATORS



GUANGZHOU MAX LABORATORY EQUIPMENT CO.,LTD.



Temperature Range: 4±1°C
Voltage: 220V/50Hz
Capacity: 70L
Power: 170W
Power Consumption: 2.0KWh/24h
External Size: 450*550*860mm
Internal Size: 370*460*640mm
Door: Double Glaze Glass Heating Door
Cooling System: Air Cooling
Defrost Type: Auto Defrosting
Shelves: 1pc
Compressor: Huayi
Temperature Controller: LED Digital Display
USB Port: No
Net Weight: 39kg
Alarm: Audible/visible
Noise: 55dBA
Package Size: 520*630*965mm
Gross Weight: 65kg
Alarm System: Yes
Alarm Way: Sound+Light
Outside Material: Cold-rolled Sheet Spraying
Inside Material: 304 Stainless Steel

HBC-L70



Temperature Range: 4±1°C
Voltage: 220V/50Hz
Capacity: 230L
Power: 280W
Power Consumption: 2.8KWh/24h
External Size: 595*605*1620mm
Internal Size: 515*510*1085mm
Door: Double Glaze Glass Heating Door
Cooling System: Air Cooling
Defrost Type: Auto Defrosted
Shelves: 5pcs
Compressor: Secop
USB Port: Yes
Temperature Controller: LED Digital Display
Net Weight: 73kg
Alarm: Audible/visible
Noise: 55dBA
Package Size: 670*680*1730mm
Gross Weight: 100kg
Alarm System: Yes
Alarm Way: Sound+Light
Outside Material: Cold-rolled Sheet Spraying
Inside Material: 304 Stainless Steel

HBC-L230



Temperature Range: 4±1°C
Voltage: 220V/50Hz
Capacity: 130L
Power: 240W
Power Consumption: 2.8KWh/24h
External Size: 522*595*1365mm
Internal Size: 432*500*843mm
Door: Double Glaze Glass Heating Door
Cooling System: Air Cooling
Defrost Type: Auto Defrosted
Shelves: 4pcs
Compressor: Secop
USB Port: Yes
Temperature Controller: LED Digital Display
Net Weight: 62kg
Alarm: Audible/visible
Noise: 55dBA
Package Size: 590*670*1470mm
Gross Weight: 85kg
Alarm System: Yes
Alarm Way: Sound+Light
Outside Material: Cold-rolled Sheet Spraying
Inside Material: 304 Stainless Steel

HBC-L130



Temperature Range: 4±1°C
Voltage: 220V/50Hz
Capacity: 300L
Power: 300W
Power Consumption: 3.6KWh/24h
External Size: 595*605*1940mm
Internal Size: 515*510*1405mm
Door: Double Glaze Glass Heating Door
Cooling System: Air Cooling
Defrost Type: Auto Defrosted
Shelves: 5pcs
Compressor: Secop
USB Port: Yes
Temperature Controller: LED Digital Display
Net Weight: 83kg
Alarm: Audible/visible
Noise: 55dBA
Package Size: 670*680*2050mm
Gross Weight: 115kg
Alarm System: Yes
Alarm Way: Sound+Light
Outside Material: Cold-rolled Sheet Spraying
Inside Material: 304 Stainless Steel

HBC-L300

4±1°C BLOOD BANK REFRIGERATORS



GUANGZHOU MAX LABORATORY EQUIPMENT CO.,LTD.



HBC-L360

Temperature Range: 4±1°C
Voltage: 220V/50Hz
Capacity: 360L
Power: 320W
Power Consumption: 4.8KWh/24h
External Size: 680*650*1975mm
Internal Size: 580*550*1520mm
Door: Double Glaze Glass Heating Door
Cooling System: Air Cooling
Defrost Type: Auto Defrosting
Shelves: 5pcs
Compressor: Secop
USB Port: Yes
Temperature Controller: LED Digital Display
Net Weight: 102kg
Alarm: Audible/visible
Noise: 55dBA
Package Size: 750*730*2085mm
Gross Weight: 132kg
Alarm System: Yes
Alarm Way: Sound+Light
Outside Material: Cold-rolled Sheet Spraying
Inside Material: 304 Stainless Steel



HBC-L560

Temperature Range: 4±1°C
Voltage: 220V/50Hz
Capacity: 560L
Power: 490W
Power Consumption: 5.9KWh/24h
External Size: 1200*650*1895mm
Internal Size: 1112*560*1232mm
Door: Double Glaze Glass Heating Door
Cooling System: Air Cooling
Defrost Type: Auto Defrosted
Shelves: 10pcs
Compressor: Secop
USB Port: Yes
Temperature Controller: LED Digital Display
Net Weight: 131kg
Alarm: Audible/visible
Noise: 55dBA
Package Size: 1270*720*1950mm
Gross Weight: 160kg
Alarm System: Yes
Alarm Way: Sound+Light
Outside Material: Cold-rolled Sheet Spraying
Inside Material: 304 Stainless Steel



HBC-L400

Temperature Range: 4±1°C
Voltage: 220V/50Hz
Capacity: 400L
Power: 430W
Power Consumption: 5.2KWh/24h
External Size: 680*745*1870mm
Internal Size: 560*610*1380mm
Door: Double Glaze Glass Heating Door
Cooling System: Air Cooling
Defrost Type: Auto Defrosted
Shelves: 5pcs
Compressor: Secop
USB Port: Yes
Temperature Controller: LED Digital Display
Net Weight: 115kg
Alarm: Audible/visible
Noise: 55dBA
Package Size: 750*790*1930mm
Gross Weight: 145kg
Alarm System: Yes
Alarm Way: Sound+Light
Outside Material: Cold-rolled Sheet Spraying
Inside Material: 304 Stainless Steel



HBC-L660

Temperature Range: 4±1°C
Voltage: 220V/50Hz
Capacity: 660L
Power: 550W
Power Consumption: 6.5KWh/24h
External Size: 1100*685*2080mm
Internal Size: 985*565*1595mm
Door: Double Glaze Glass Heating Door
Cooling System: Air Cooling
Defrost Type: Auto Defrosted
Shelves: 10pcs
Compressor: Secop
USB Port: Yes
Temperature Controller: LED Digital Display
Net Weight: 175kg
Alarm: Audible/visible
Noise: 55dBA
Package Size: 1170*755*2190mm
Gross Weight: 210kg
Alarm System: Yes
Alarm Way: Sound+Light
Outside Material: Cold-rolled Sheet Spraying
Inside Material: 304 Stainless Steel

4±1°C BLOOD BANK REFRIGERATORS



GUANGZHOU MAX LABORATORY EQUIPMENT CO.,LTD.



HBC-L760

Temperature Range: 4±1°C
Voltage: 220V/50Hz
Capacity: 760L
Power: 580W
Power Consumption: 7.2KWh/24h
External Size: 1200*745*1870mm
Internal Size: 1080*610*1380mm
Door: Double Glaze Glass Heating Door
Cooling System: Air Cooling
Defrost Type: Auto Defrosting
Shelves: 10pcs
Compressor: Secop
USB Port: Yes
Temperature Controller: LED Digital Display
Net Weight: 158kg
Alarm: Audible/visible
Noise: 55dBA
Package Size: 1290*810*2020mm
Gross Weight: 185kg
Alarm System: Yes
Alarm Way: Sound+Light
Outside Material: Cold-rolled Sheet Spraying
Inside Material: 304 Stainless Steel



HBC-L1360

Temperature Range: 4±1°C
Voltage: 220V/50Hz
Capacity: 1360L
Power: 720W
Power Consumption: 8.6KWh/24h
External Size: 1880*745*2070mm
Internal Size: 1790*590*1570mm
Door: Double Glaze Glass Heating Door
Cooling System: Air Cooling
Defrost Type: Auto Defrosted
Shelves: 15pcs
Compressor: Secop
USB Port: Yes
Temperature Controller: LED Digital Display
Net Weight: 195kg
Alarm: Audible/visible
Noise: 55dBA
Package Size: 1960*790*2130mm
Gross Weight: 235kg
Alarm System: Yes
Alarm Way: Sound+Light
Outside Material: Cold-rolled Sheet Spraying
Inside Material: 304 Stainless Steel



HBC-L1160

Temperature Range: 4±1°C
Voltage: 220V/50Hz
Capacity: 1160L
Power: 650W
Power Consumption: 7.8KWh/24h
External Size: 1800*745*1870mm
Internal Size: 1680*610*1380mm
Door: Double Glaze Glass Heating Door
Cooling System: Air Cooling
Defrost Type: Auto Defrosted
Shelves: 15pcs
Compressor: Secop
USB Port: Yes
Temperature Controller: LED Digital Display
Net Weight: 171kg
Alarm: Audible/visible
Noise: 55dBA
Package Size: 1880*790*1930mm
Gross Weight: 210kg
Alarm System: Yes
Alarm Way: Sound+Light
Outside Material: Cold-rolled Sheet Spraying
Inside Material: 304 Stainless Steel

2°C TO 8°C REFRIGERATOR



GUANGZHOU MAX LABORATORY EQUIPMENT CO.,LTD.



HLC-L160

Temperature: 2~8°C
CVoltage: 220V/50HZ
Capacity: 160L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 240W
Power Consumption: 2.8KWh/24h
Shelve: 4PCS
Compressor: Huayi
Fan: EMB
External Dimension: 522*595*1365mm
Internal Dimension: 432*500*843mm
Refrigerant: R134a
Net Weight: 60kg
Noise: 50dbA
External Material: Powder Coated Steel Sheet
Internal Material: Powder Coated Steel Sheet
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HLC-L360

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 360L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 300W
Power Consumption: 3.6KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 595*605*1940mm
Internal Dimension: 515*510*1405mm
Refrigerant: R134a
Net Weight: 80kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Powder Coated Steel Sheet
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HLC-L260

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 260L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 280W
Power Consumption: 3.4KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 595*605*1620mm
Internal Dimension: 515*510*1085mm
Refrigerant: R134a
Net Weight: 69kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Powder Coated Steel Sheet
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HLC-L460

Temperature: 2~8°C
CVoltage: 220V/50HZ
Capacity: 460L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 430W
Power Consumption: 5.2KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 680*745*1870mm
Internal Dimension: 560*610*1380mm
Refrigerant: R134a
Net Weight: 111kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Powder Coated Steel Sheet
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm

2°C TO 8°C REFRIGERATOR



GUANGZHOU MAX LABORATORY EQUIPMENT CO.,LTD.



HLC-L660

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 660L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 490W
Power Consumption: 5.9KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 1200*650*1895mm
Internal Dimension: 1112*560*1232mm
Refrigerant: R134a
Net Weight: 129kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Powder Coated Steel Sheet
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HLC-L1360

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 1360L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 650W
Power Consumption: 7.8KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 1800*745*1870mm
Internal Dimension: 1680*610*1380mm
Refrigerant: R134a
Net Weight: 158kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Powder Coated Steel Sheet
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HLC-L960

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 960L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 580W
Power Consumption: 7.2KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 1200*745*1870mm
Internal Dimension: 1080*610*1380mm
Refrigerant: R134a
Net Weight: 141kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Powder Coated Steel Sheet
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm




HLC-L288

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 288L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 300W
Power Consumption: 3.9KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 605*675*1610mm
Internal Dimension: 525*575*1050mm
Refrigerant: R134a
Net Weight: 94kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Powder Coated Steel Sheet
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm

2°C TO 8°C REFRIGERATOR



GUANGZHOU MAX LABORATORY EQUIPMENT CO.,LTD.

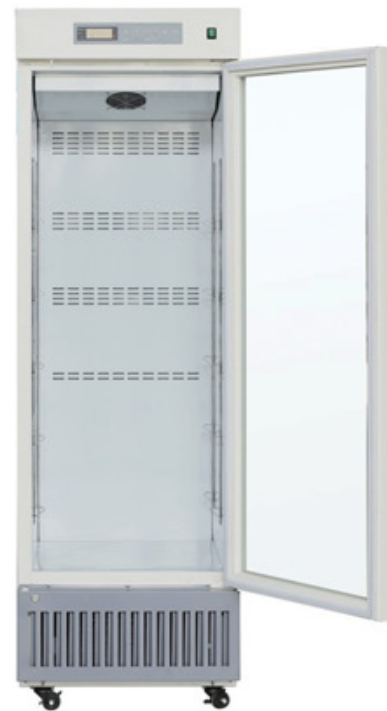

HLC-L388

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 388L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 320W
Power Consumption: 4.3KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 605*675*1925mm
Internal Dimension: 525*575*1365mm
Refrigerant: R134a
Net Weight: 107kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Powder Coated Steel Sheet
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HLC-L868

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 868L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 480W
Power Consumption: 6.1KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 1220*755*1885mm
Internal Dimension: 1100*635*1325mm
Refrigerant: R134a
Net Weight: 178kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Powder Coated Steel Sheet
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HLC-L668

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 668L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 420W
Power Consumption: 5.5KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 1220*625*1885mm
Internal Dimension: 1100*505*1325mm
Refrigerant: R134a
Net Weight: 155kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Powder Coated Steel Sheet
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HLC-L1008

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 1008L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 500W
Power Consumption: 6.5KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 1220*855*1885mm
Internal Dimension: 1100*735*1325mm
Refrigerant: R134a
Net Weight: 194kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Powder Coated Steel Sheet
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm

2°C TO 8°C REFRIGERATOR



GUANGZHOU MAX LABORATORY EQUIPMENT CO.,LTD.



HYC-L70

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 70L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 170W
Power Consumption: 2KWh/24h
Shelve: 1PC
Compressor: Huayi
Fan: EMB
External Dimension: 450*550*860mm
Internal Dimension: 370*460*640mm
Door: Electrically Heated Tempered Glass Door
Refrigerant: R134a
Net Weight: 39kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Spraying Aluminum Plate
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HYC-L230

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 230L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 280W
Power Consumption: 3.4KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 595*605*1620mm
Internal Dimension: 515*510*1085mm
Door: Electrically Heated Tempered Glass Door
Refrigerant: R134a
Net Weight: 73kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Spraying Aluminum Plate
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HYC-L130

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 130L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 240W
Power Consumption: 2.8KWh/24h
Shelve: 4PCS
Compressor: Huayi
Fan: EMB
External Dimension: 522*595*1365mm
Internal Dimension: 432*500*843mm
Door: Electrically Heated Tempered Glass Door
Refrigerant: R134a
Net Weight: 62kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Spraying Aluminum Plate
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HYC-L300

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 300L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 300W
Power Consumption: 3.6KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 595*605*1940mm
Internal Dimension: 515*510*1405mm
Door: Electrically Heated Tempered Glass Door
Refrigerant: R134a
Net Weight: 83kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Spraying Aluminum Plate
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm

2°C TO 8°C REFRIGERATOR



HYC-L360

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 360L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 320W
Power Consumption: 4.8KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 680*650*1975mm
Internal Dimension: 580*550*1520mm
Door: Electrically Heated Tempered Glass Door
Refrigerant: R134a
Net Weight: 132kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Spraying Aluminum Plate
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HYC-L560

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 560L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 490W
Power Consumption: 5.9KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 1200*650*1895mm
Internal Dimension: 1112*560*1232mm
Door: Electrically Heated Tempered Glass Door
Refrigerant: R134a
Net Weight: 131kg
Noise: 55dbA
External Material: Powder Coated Steel Sheet
Internal Material: Spraying Aluminum Plate
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HYC-L400

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 400L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 430W
Power Consumption: 5.2KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 680*745*1870mm
Internal Dimension: 560*610*1380mm
Door: Electrically Heated Tempered Glass Door
Refrigerant: R134a
Net Weight: 115kg
Noise: 55dbA
External Material: Powder Coated Steel Sheet
Internal Material: Spraying Aluminum Plate
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HYC-L660

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 660L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 550W
Power Consumption: 6.5KWh/24h
Shelve: 10PCS
Compressor: Huayi
Fan: EMB
External Dimension: 1100*685*2080mm
Internal Dimension: 985*565*1595mm
Door: Electrically Heated Tempered Glass Door
Refrigerant: R134a
Net Weight: 175kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Spraying Aluminum Plate
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm

2°C TO 8°C REFRIGERATOR



HYC-L760

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 760L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 580W
Power Consumption: 7.2KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 1200*745*1870mm
Internal Dimension: 1080*610*1380mm
Door: Electrically Heated Tempered Glass Door
Refrigerant: R134a
Net Weight: 158kg
Noise: 55dbA
External Material: Powder Coated Steel Sheet
Internal Material: Spraying Aluminum Plate
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HYC-L1360

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 1360L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 720W
Power Consumption: 8.6KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 1880*745*2070mm
Internal Dimension: 1790*590*1570mm
Door: Electrically Heated Tempered Glass Door
Refrigerant: R134a
Net Weight: 195kg
Noise: 55dbA
External Material: Powder Coated Steel Sheet
Internal Material: Spraying Aluminum Plate
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HYC-L1160

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 1160L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 650W
Power Consumption: 7.8KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 1800*745*1870mm
Internal Dimension: 1680*610*1380mm
Door: Electrically Heated Tempered Glass Door
Refrigerant: R134a
Net Weight: 171kg
Noise: 55dbA
External Material: Powder Coated Steel Sheet
Internal Material: Spraying Aluminum Plate
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HYC-L68

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 68L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 170W
Power Consumption: 2KWh/24h
Shelve: 1PC
Compressor: Huayi
Fan: EMB
External Dimension: 450*550*860mm
Internal Dimension: 370*460*640mm
Door: Electrically Heated Tempered Glass Door
Refrigerant: R134a
Net Weight: 68kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Spraying Aluminum Plate
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm

2°C TO 8°C REFRIGERATOR



GUANGZHOU MAX LABORATORY EQUIPMENT CO.,LTD.



HYC-L128

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 128L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 240W
Power Consumption: 2.8KWh/24h
Shelve: 4PCS
Compressor: Huayi
Fan: EMB
External Dimension: 522*595*1365mm
Internal Dimension: 432*500*843mm
Door: Electrically Heated Tempered Glass Door
Refrigerant: R134a
Net Weight: 75kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Spraying Aluminum Plate
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HYC-L388

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 388L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 320W
Power Consumption: 4.3KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 605*675*1925mm
Internal Dimension: 525*575*1365mm
Door: Electrically Heated Tempered Glass Door
Refrigerant: R134a
Net Weight: 107kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Spraying Aluminum Plate
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HYC-L288

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 288L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 300W
Power Consumption: 3.9KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 605*675*1610mm
Internal Dimension: 525*575*1050mm
Door: Electrically Heated Tempered Glass Door
Refrigerant: R134a
Net Weight: 94kg
Noise: 52dbA
External Material: Powder Coated Steel Sheet
Internal Material: Spraying Aluminum Plate
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HYC-L668

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 668L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 430W
Power Consumption: 5.5KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 1220*625*1885mm
Internal Dimension: 1100*505*1325mm
Door: Electrically Heated Tempered Glass Door
Refrigerant: R134a
Net Weight: 155kg
Noise: 55dbA
External Material: Powder Coated Steel Sheet
Internal Material: Spraying Aluminum Plate
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm

2°C TO 8°C REFRIGERATOR



HYC-L868

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 868L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 480W
Power Consumption: 6.1KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 1220*755*1885mm
Internal Dimension: 1100*635*1325mm
Door: Electrically Heated Tempered Glass Door
Refrigerant: R134a
Net Weight: 178kg
Noise: 55dbA
External Material: Powder Coated Steel Sheet
Internal Material: Spraying Aluminum Plate
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm



HYC-L1008

Temperature: 2~8°C
Voltage: 220V/50HZ
Capacity: 1008L
Cooling Type: Air Cooling
Controller: Microprocessor
Display: Digital
Light: LED light
Power: 500W
Power Consumption: 6.5KWh/24h
Shelve: 5PCS
Compressor: Huayi
Fan: EMB
External Dimension: 1220*855*1885mm
Internal Dimension: 1100*735*1325mm
Door: Electrically Heated Tempered Glass Door
Refrigerant: R134a
Net Weight: 194kg
Noise: 55dbA
External Material: Powder Coated Steel Sheet
Internal Material: Spraying Aluminum Plate
Alarm Function: High and Low Temperature Alarm
Sensor Fault Alarm,
Door Opening Alarm,
Power Off Alarm
Alarm Method: Sound-light Alarm

0°C TO -25°C FREEZERS



DW-25L98

Item Name: Medical Deep Freezer
Temperature Range: -25 to 0° C
Type: Vertical
Capacity: 98L
Voltage: 220V/50Hz
External Dimension: 620*620*1240mm
Internal Dimension: 400*390*660mm
Cooling System: Direct Cold
Compressor: Secop
Temperature Controller: LED Display
Power: 280W
Power Consumption: 2.9KWh/24h
Noise:55dBA
Shelves: 1pc
Package Size: 660*680*1400mm
Net Weight: 90kg
Alarm System: Audible/visible
Alarm Way: Sound+Light
Outside Material: Cold-rolled Sheet Spraying
Inside Material: 304 Stainless Steel
Guarantee Time of Machine: 1Year
Guarantee Time of Compressor: 3 Years



DW-25L278

Item Name: Medical Deep Freezer
Temperature Range: -25 to 0° C
Type: Vertical
Capacity: 278L
Voltage: 220V/50Hz
External Dimension: 690*705*1700mm
Internal Dimension: 510*515*1100mm
Cooling System: Direct Cold
Compressor: Secop
Temperature Controller: LED Display
Power: 350W
Power Consumption: 4.6KWh/24h
Noise:58dBA
Shelves: 4pcs
Package Size: 760*775*1840mm
Net Weight: 116kg
Alarm System: Audible/visible
Alarm Way: Sound+Light
Outside Material: Cold-rolled Sheet Spraying
Inside Material: 304 Stainless Steel
Guarantee Time of Machine: 1Year
Guarantee Time of Compressor: 3 Years



DW-25L188

Item Name: Medical Deep Freezer
Temperature Range: -25 to 0° C
Type: Vertical
Capacity: 188L
Voltage: 220V/50Hz
External Dimension: 620*645*1570mm
Internal Dimension: 440*425*985mm
Cooling System: Direct Cold
Compressor: Secop
Temperature Controller: LED Display
Power: 320W
Power Consumption: 4.3KWh/24h
Noise:55dBA
Shelves: 4pcs
Package Size: 690*715*1710mm
Net Weight: 102kg
Alarm System: Audible/visible
Alarm Way: Sound+Light
Outside Material: Cold-rolled Sheet Spraying
Inside Material: 304 Stainless Steel
Guarantee Time of Machine: 1Year
Guarantee Time of Compressor: 3 Years



DW-25L368

Item Name: Medical Deep Freezer
Temperature Range: -25 to 0° C
Type: Vertical
Capacity: 368L
Voltage: 220V/50Hz
External Dimension: 690*705*1965mm
Internal Dimension: 510*515*1366mm
Cooling System: Direct Cold
Compressor: Secop
Temperature Controller: LED Display
Power: 420W
Power Consumption: 5.5KWh/24h
Noise:58dBA
Shelves: 5pcs
Package Size: 760*775*2105mm
Net Weight: 123kg
Alarm System: Audible/visible
Alarm Way: Sound+Light
Outside Material: Cold-rolled Sheet Spraying
Inside Material: 304 Stainless Steel
Guarantee Time of Machine: 1Year
Guarantee Time of Compressor: 3 Years

0°C TO -25°C FREEZERS



DW-25W88

Item Name: Medical Deep Freezer
Temperature Range: -25 to 0°C
Type: Horizontal
Capacity: 88L
Voltage: 220V/50Hz
External Dimension: 670*765*905mm
Internal Dimension: 530*530*320mm
Cooling System: Direct Cold
Compressor: Secop
Temperature Controller: LED Display
Power: 300W
Power Consumption: 3.1KWh/24h
Noise:56dBA
Package Size: 770*845*1055mm
Net Weight: 76kg
Alarm System: Audible/visible
Alarm Way: Sound+Light
Outside Material: Cold-rolled Sheet Spraying
Inside Material: 304 Stainless Steel
Guarantee Time of Machine: 1Year
Guarantee Time of Compressor: 3 Years



DW-25W298

Item Name: Medical Deep Freezer
Temperature Range: -25 to 0°C
Type: Horizontal
Capacity: 298L
Voltage: 220V/50Hz
External Dimension: 1160*765*885mm
Internal Dimension: 1020*530*590mm
Cooling System: Direct Cold
Compressor: Secop
Temperature Controller: LED Display
Power: 360W
Power Consumption: 4.0KWh/24h
Noise:56dBA
Package Size: 1260*845*1035mm
Net Weight: 103kg
Alarm System: Audible/visible
Alarm Way: Sound+Light
Outside Material: Cold-rolled Sheet Spraying
Inside Material: 304 Stainless Steel
Guarantee Time of Machine: 1Year
Guarantee Time of Compressor: 3 Years



DW-25W158

Item Name: Medical Deep Freezer
Temperature Range: -25 to 0°C
Type: Horizontal
Capacity: 158L
Voltage: 220V/50Hz
External Dimension: 900*765*945mm
Internal Dimension: 760*530*380mm
Cooling System: Direct Cold
Compressor: Secop
Temperature Controller: LED Display
Power: 310W
Power Consumption: 3.3KWh/24h
Noise:56dBA
Package Size: 1000*845*1095mm
Net Weight: 86kg
Alarm System: Audible/visible
Alarm Way: Sound+Light
Outside Material: Cold-rolled Sheet Spraying
Inside Material: 304 Stainless Steel
Guarantee Time of Machine: 1Year
Guarantee Time of Compressor: 3 Years



DW-25W398

Item Name: Medical Deep Freezer
Temperature Range: -25 to 0°C
Type: Horizontal
Capacity: 398L
Voltage: 220V/50Hz
External Dimension: 1530*765*885mm
Internal Dimension: 1390*530*590mm
Cooling System: Direct Cold
Compressor: Secop
Temperature Controller: LED Display
Power: 450W
Power Consumption: 4.8KWh/24h
Noise:56dBA
Package Size: 1630*845*1035mm
Net Weight: 122kg
Alarm System: Audible/visible
Alarm Way: Sound+Light
Outside Material: Cold-rolled Sheet Spraying
Inside Material: 304 Stainless Steel
Guarantee Time of Machine: 1Year
Guarantee Time of Compressor: 3 Years

0°C TO -25°C FREEZERS



DW-25W498

Item Name: Medical Deep Freezer
Temperature Range: -25 to 0°C
Type: Horizontal
Capacity: 498L
Voltage: 220V/50Hz
External Dimension: 1680*765*970mm
Internal Dimension: 1540*530*690mm
Cooling System: Direct Cold
Compressor: Secop
Temperature Controller: LED Display
Power: 500W
Power Consumption: 6.2KWh/24h
Noise: 56dBA
Package Size: 1780*845*1135mm
Net Weight: 141kg
Alarm System: Audible/visible
Alarm Way: Sound+Light
Outside Material: Cold-rolled Sheet Spraying
Inside Material: 304 Stainless Steel
Guarantee Time of Machine: 1Year
Guarantee Time of Compressor: 3 Years



DW-25W25

Item Name: Medical Deep Freezer
Temperature Range: -25 to 0°C
Type: Portable
Capacity: 25L
Voltage: DC12V/24V
External Dimension: 780*410*515mm
Internal Dimension: 327*200*305mm
Cooling System: Direct Cold
Compressor: Secop
Temperature Controller: LED Display
Power: 60W
Power Consumption: 1.1KWh/24h
Noise: 55dBA
Package Size: 860*490*680mm
N.W./G.W.: 21/45kg
Alarm System: Audible/visible
Alarm Way: Sound+Light
Outside Material: PP
Inside Material: 304 Stainless Steel
Guarantee Time of Machine: 1Year
Guarantee Time of Compressor: 3 Years

-40°C LOW TEMP FREEZERS



DW-40L98A

Cabinet Type: Vertical
Capacity(L): 98L
Temperature Range: -15 to -40°C
Voltage: 220v/50Hz
Power: 290W
Power Consumption: 2.9KWh/24h
External Material: Galvanized Sheet Sprayed
Inner Material:304 Stainless Steel
Internal Size(W*D*H): 400*390*660mm
External Size(W*D*H): 620*620*1240mm
Package Size(W*D*H): 690*715*1380mm
NW/GW(Kgs): 90/115Kg
Shelves: 1PC
Door Lock with Key: Yes
Casters: 4Pcs
Climate Class: N
Controller: Microprocessor
Display:LED Digital
Alarm Type: High/Low Temperature
High Ambient Temperature
Sensor Failure
Alarm Method: Sound-light
Compressor: Secop
Cooling Method: Direct-Cold
Defrost Mode: Manual
Refrigerant: CFC Mixed Refrigerants
Insulation Thickness: 90mm



DW-40L278

Cabinet Type: Vertical
Capacity(L): 278L
Temperature Range: -15 to -40°C
Voltage: 220v/50Hz
Power: 350W
Power Consumption: 4.6KWh/24h
External Material: Galvanized Sheet Sprayed
Inner Material:304 Stainless Steel
Internal Size(W*D*H): 510*515*1100mm
External Size(W*D*H): 690*705*1700mm
Package Size(W*D*H): 760*775*1840mm
NW/GW(Kgs): 116/142Kg
Shelves: 1PC
Door Lock with Key: Yes
Casters: 4Pcs
Climate Class: N
Controller: Microprocessor
Display:LED Digital
Alarm Type: High/Low Temperature
High Ambient Temperature
Sensor Failure
Alarm Method: Sound-light
Compressor: Secop
Cooling Method: Direct-Cold
Defrost Mode: Manual
Refrigerant: CFC Mixed Refrigerants
Insulation Thickness: 90mm



DW-40L188

Cabinet Type: Vertical
Capacity(L): 188L
Temperature Range: -15 to -40°C
Voltage: 220v/50Hz
Power: 320W
Power Consumption: 4.3KWh/24h
External Material: Galvanized Sheet Sprayed
Inner Material:304 Stainless Steel
Internal Size(W*D*H): 440*425*985mm
External Size(W*D*H):620*645*1570mm
Package Size(W*D*H):690*715*1710mm
NW/GW(Kgs): 102/127Kg
Shelves: 1PC
Door Lock with Key: Yes
Casters: 4Pcs
Climate Class: N
Controller: Microprocessor
Display:LED Digital
Alarm Type: High/Low Temperature
High Ambient Temperature
Sensor Failure
Alarm Method: Sound-light
Compressor: Secop
Cooling Method: Direct-Cold
Defrost Mode: Manual
Refrigerant: CFC Mixed Refrigerants
Insulation Thickness: 90mm



DW-40L368

Cabinet Type: Vertical
Capacity(L): 368L
Temperature Range: -15 to -40°C
Voltage: 220v/50Hz
Power: 420W
Power Consumption: 5.2KWh/24h
External Material: Galvanized Sheet Sprayed
Inner Material:304 Stainless Steel
Internal Size(W*D*H): 510*515*1366mm
External Size(W*D*H): 690*705*1965mm
Package Size(W*D*H): 760*775*2105mm
NW/GW(Kgs): 123/155Kg
Shelves: 1PC
Door Lock with Key: Yes
Casters: 4Pcs
Climate Class: N
Controller: Microprocessor
Display:LED Digital
Alarm Type: High/Low Temperature
High Ambient Temperature
Sensor Failure
Alarm Method: Sound-light
Compressor: Secop
Cooling Method: Direct-Cold
Defrost Mode: Manual
Refrigerant: CFC Mixed Refrigerants
Insulation Thickness: 90mm

-80°C ULT CHEST FREEZERS



Item Name: Ultra Low Temperature Chest Freezer
Temperature Range: -40 to -80°C
Type: Horizontal
Capacity: 60L
Voltage: 220V/50Hz
External Size: 670*765*905mm
Internal Size: 470*470*300mm
Cooling System: Direct Cold
Compressor: SECOP
Fan: EBM
Net Weight: 78kg
External Material: Cold Rolled Plate Spraying
Internal Material: 304 Stainless Steel
Alarm: High and Low Temperature Alarm,
Sensor Fault Alarm
Power: 350W
Power consumption: 4.7KWh/24h
Noise: 60dBA
Package Size: 770*845*1055mm

DW-80W60



Item Name: Ultra Low Temperature Chest Freezer
Temperature Range: -40 to -80°C
Type: Horizontal
Capacity: 220L
Voltage: 220V/50Hz
External Size: 1160*765*885mm
Internal Size: 960*470*600mm
Cooling System: Direct Cold
Compressor: SECOP
Fan: EBM
Net Weight: 106kg
External Material: Cold Rolled Plate Spraying
Internal Material: 304 Stainless Steel
Alarm: High and Low Temperature Alarm,
Sensor Fault Alarm
Power: 420W
Power consumption: 5.9KWh/24h
Noise: 60dBA
Package Size: 1260*845*1035mm

DW-80W220



Item Name: Ultra Low Temperature Chest Freezer
Temperature Range: -40 to -80°C
Type: Horizontal
Capacity: 120L
Voltage: 220V/50Hz
External Size: 900*765*945mm
Internal Size: 700*470*385mm
Cooling System: Direct Cold
Compressor: SECOP
Fan: EBM
Net Weight: 89kg
External Material: Cold Rolled Plate Spraying
Internal Material: 304 Stainless Steel
Alarm: High and Low Temperature Alarm,
Sensor Fault Alarm
Power: 370W
Power consumption: 5.1KWh/24h
Noise: 60dBA
Package Size: 1000*845*1095mm

DW-80W120



Item Name: Ultra Low Temperature Chest Freezer
Temperature Range: -40 to -80°C
Type: Horizontal
Capacity: 320L
Voltage: 220V/50Hz
External Size: 1530*765*885mm
Internal Size: 1330*470*600mm
Cooling System: Direct Cold
Compressor: SECOP
Fan: EBM
Net Weight: 126kg
External Material: Cold Rolled Plate Spraying
Internal Material: 304 Stainless Steel
Alarm: High and Low Temperature Alarm,
Sensor Fault Alarm
Power: 500W
Power consumption: 7.8KWh/24h
Noise: 60dBA
Package Size: 1630*845*1035mm

DW-80W320

-80°C ULT CHEST FREEZERS



Item Name: Ultra Low Temperature Chest Freezer
Temperature Range: -40 to -80°C
Type: Horizontal
Capacity: 420L
Voltage: 220V/50Hz
External Size: 1680*765*985mm
Internal Size: 1480*470*680mm
Cooling System: Direct Cold
Compressor: SECOP
Fan: EBM
Net Weight: 146kg
External Material: Cold Rolled Plate Spraying
Internal Material: 304 Stainless Steel
Alarm: High and Low Temperature Alarm,
Sensor Fault Alarm
Power: 530W
Power consumption: 9.5KWh/24h
Noise: 60dBA
Package Size: 1780*845*1135mm

DW-80W420



Item Name: Ultra Low Temperature Chest Freezer
Temperature Range: -40 to -80°C
Type: Horizontal
Capacity: 620L
Voltage: 220V/50Hz
External Size: 2110*895*1005mm
Internal Size: 1480*600*695mm
Cooling System: Direct Cold
Compressor: SECOP
Fan: EBM
Net Weight: 174kg
External Material: Cold Rolled Plate Spraying
Internal Material: 304 Stainless Steel
Alarm: High and Low Temperature Alarm,
Sensor Fault Alarm
Power: 550W
Power consumption: 10.2KWh/24h
Noise: 60dBA
Package Size: 2210*975*1155mm

DW-80W620



Item Name: Ultra Low Temperature Chest Freezer
Temperature Range: -40 to -80°C
Type: Horizontal
Capacity: 520L
Voltage: 220V/50Hz
External Size: 1850*895*1005mm
Internal Size: 1220*600*695mm
Cooling System: Direct Cold
Compressor: SECOP
Fan: EBM
Net Weight: 153kg
External Material: Cold Rolled Plate Spraying
Internal Material: 304 Stainless Steel
Alarm: High and Low Temperature Alarm,
Sensor Fault Alarm
Power: 530W
Power consumption: 9.7KWh/24h
Noise: 60dBA
Package Size: 1950*975*1155mm

DW-80W520

-86°C ULT FREEZERS



DW-86L028

Item Name: Medical Deep Freezer
Temperature Range: -40 to -86° C
Type: Vertical
Capacity: 28L
Voltage: 220V/50Hz
External Size: 470*490*1120mm
Internal Size: 270*265*400mm
Cooling System: Direct Cold
Compressor: SECOP
Temperature Controller: LED Display
Net Weight: 66kg
Alarm: Audible/visible
Power: 400W
Power consumption: 6.1KWh/24h
Noise:60dBA
Package Size: 550*590*1270mm



DW-86L108

Item Name: Medical Deep Freezer
Temperature Range: -40 to -86° C
Type: Vertical
Capacity: 108L
Voltage: 220V/50Hz
External Size: 700*730*1260mm
Internal Size: 460*460*510mm
Cooling System: Direct Cold
Compressor: SECOP
Temperature Controller: LED Display
Net Weight: 107kg
Alarm: Audible/visible
Power: 480W
Power consumption: 7.3KWh/24h
Noise:60dBA
Package Size: 780*830*1410mm



DW-86L058

Item Name: Medical Deep Freezer
Temperature Range: -40 to -86° C
Type: Vertical
Capacity: 58L
Voltage: 220V/50Hz
External Size: 600*665*1150mm
Internal Size: 364*405*410mm
Cooling System: Direct Cold
Compressor: SECOP
Temperature Controller: LED Display
Net Weight: 78kg
Alarm: Audible/visible
Power: 450W
Power consumption: 6.7KWh/24h
Noise:60dBA
Package Size: 620*720*1265mm



DW-86L158

Item Name: Medical Deep Freezer
Temperature Range: -40 to -86° C
Type: Vertical
Capacity: 158L
Voltage: 220V/50Hz
External Size: 700*700*1580mm
Internal Size: 460*455*800mm
Cooling System: Direct Cold
Compressor: SECOP
Temperature Controller: LED Display
Net Weight: 123kg
Alarm: Audible/visible
Power: 500W
Power consumption: 7.8KWh/24h
Noise:60dBA
Package Size: 780*800*1730mm

-86°C ULT FREEZERS



Item Name: Medical Deep Freezer
Temperature Range: -40 to-86° C
Type: Vertical
Capacity: 208L
Voltage: 220V/50Hz
External Size: 810*730*1600mm
Internal Size: 570*485*800mm
Cooling System: Direct Cold
Compressor: SECOP
Temperature Controller: LED Display
Net Weight: 142kg
Alarm: Audible/visible
Power: 550W
Power consumption: 8.4KWh/24h
Noise:60dBA
Package Size: 890*830*1750mm

DW-86L208



Item Name: Medical Deep Freezer
Temperature Range: -40 to-86° C
Type: Vertical
Capacity: 408L
Voltage: 220V/50Hz
External Size: 850*960*1860mm
Internal Size: 550*630*1140mm
Cooling System: Direct Cold
Compressor: SECOP
Temperature Controller: LED Display
Net Weight: 200kg
Alarm: Audible/visible
Power: 600W
Power consumption: 9.4KWh/24h
Noise:60dBA
Package Size: 980*1060*2010mm

DW-86L408



Item Name: Medical Deep Freezer
Temperature Range: -40 to-86° C
Type: Vertical
Capacity: 308L
Voltage: 220V/50Hz
External Size: 810*760*1810mm
Internal Size: 570*485*1140mm
Cooling System: Direct Cold
Compressor: SECOP
Temperature Controller: LED Display
Net Weight: 160kg
Alarm: Audible/visible
Power: 580W
Power consumption: 8.9KWh/24h
Noise:60dBA
Package Size: 890*860*1960mm

DW-86L308



Item Name: Medical Deep Freezer
Temperature Range: -40 to-86° C
Type: Vertical
Capacity: 508L
Voltage: 220V/50Hz
External Size: 870*1030*1975mm
Internal Size: 570*710*1125mm
Cooling System: Direct Cold
Compressor: SECOP
Temperature Controller: LED Display
Net Weight: 265kg
Alarm: Audible/visible
Power: 880W
Power consumption: 12.9KWh/24h
Noise:60dBA
Package Size: 1000*1130*2125mm

DW-86L508

-86°C ULT FREEZERS



GUANGZHOU MAX LABORATORY EQUIPMENT CO.,LTD.



Item Name: Medical Deep Freezer
Temperature Range: -40 to-86° C
Type: Vertical
Capacity: 608L
Voltage: 220V/50Hz
External Size: 940*980*1920mm
Internal Size: 700*680*1255mm
Cooling System: Direct Cold
Compressor: SECOP
Temperature Controller: LED Display
Net Weight: 250kg
Alarm: Audible/visible
Power:900W
Power consumption: 13.5KWh/24h
Noise:60dBA
Package Size: 1070*1080*2070mm

DW-86L608



Item Name: Medical Deep Freezer
Temperature Range: -40 to-86° C
Type: Vertical
Capacity: 808L
Voltage: 220V/50Hz
External Size: 1090*1010*2025mm
Internal Size: 850*735*1335mm
Cooling System: Direct Cold
Compressor: SECOP
Temperature Controller: LED Display
Net Weight: 300kg
Alarm: Audible/visible
Power: 950W
Power consumption: 14.8KWh/24h
Noise:60dBA
Package Size: 1220*1110*2175mm

DW-86L808



Item Name: Medical Deep Freezer
Temperature Range: -40 to-86° C
Type: Vertical
Capacity: 708L
Voltage: 220V/50Hz
External Size: 1090*1010*1860mm
Internal Size: 850*735*1170mm
Cooling System: Direct Cold
Compressor: SECOP
Temperature Controller: LED Display
Net Weight: 285kg
Alarm: Audible/visible
Power: 920W
Power consumption: 14.2KWh/24h
Noise:60dBA
Package Size: 1220*1080*2070mm

DW-86L708



Item Name: Medical Deep Freezer
Temperature Range: -40 to-86° C
Type: Vertical
Capacity: 938L
Voltage: 220V/50Hz
External Size: 1240*1000*2000mm
Internal Size: 1000*700*1335mm
Cooling System: Direct Cold
Compressor: Cubigel
Temperature Controller: LED Display
Net Weight: 320kg
Alarm: Audible/visible
Power: 1020W
Power consumption: 16.2KWh/24h
Noise:60dBA
Package Size: 1370*1100*2150mm

DW-86L938

-86°C ULT FREEZERS



Item Name: Medical Deep Freezer (Double System)
Temperature Range: -40 to -86° C
Type: Vertical
Capacity: 158L
Voltage: 220V/50Hz
External Size: 700*700*1580mm
Internal Size: 460*455*800mm
Cooling System: Direct Cold
Compressor: SECOP(Dual System)
Temperature Controller: LED Display
Net Weight: 128kg
Alarm: Audible/visible
Power:900W
Power consumption: 7.8KWh/24h
Noise:54dBA
Package Size: 780*800*1730mm

DW-86L158S



Item Name: Medical Deep Freezer (Double System)
Temperature Range: -40 to -86° C
Type: Vertical
Capacity: 308L
Voltage: 220V/50Hz
External Size: 810*760*1810mm
Internal Size: 570*485*1140mm
Cooling System: Direct Cold
Compressor: SECOP(Dual System)
Temperature Controller: LED Display
Net Weight: 165kg
Alarm: Audible/visible
Power:1100W
Power consumption: 8.9KWh/24h
Noise:58dBA
Package Size: 890*860*1960mm

DW-86L308S



Item Name: Medical Deep Freezer (Double System)
Temperature Range: -40 to -86° C
Type: Vertical
Capacity: 208L
Voltage: 220V/50Hz
External Size: 810*730*1600mm
Internal Size: 570*485*800mm
Cooling System: Direct Cold
Compressor: SECOP(Dual System)
Temperature Controller: LED Display
Net Weight: 147kg
Alarm: Audible/visible
Power:1000W
Power consumption: 8.4KWh/24h
Noise:54dBA
Package Size: 890*830*1750mm

DW-86L208S



Item Name: Medical Deep Freezer (Double System)
Temperature Range: -40 to -86° C
Type: Vertical
Capacity: 408L
Voltage: 220V/50Hz
External Size: 850*960*1860mm
Internal Size: 550*630*1140mm
Cooling System: Direct Cold
Compressor: SECOP(Dual System)
Temperature Controller: LED Display
Net Weight: 205kg
Alarm: Audible/visible
Power:1200W
Power consumption: 9.4KWh/24h
Noise:58dBA
Package Size: 980*1060*2010mm

DW-86L408S



Item Name: Medical Deep Freezer (Double System)
Temperature Range: -40 to -86° C
Type: Vertical
Capacity: 508L
Voltage: 220V/50Hz
External Size: 870*1030*1975mm
Internal Size: 570*710*1125mm
Cooling System: Direct Cold
Compressor: SECOP(Dual System)
Temperature Controller: LED Display
Net Weight: 270kg
Alarm: Audible/visible
Power:1200W
Power consumption: 12.9KWh/24h
Noise:58dBA
Package Size: 1000*1130*2125mm

DW-86L508S



Item Name: Medical Deep Freezer
Temperature Range: -40 to-86° C
Type: Horizontal
Capacity: 118L
Voltage: 220V/50Hz
External Size: 1270*795*990mm
Internal Size: 540*400*560mm
Cooling System: Direct Cold
Compressor: SECOP
Temperature Controller: LED Display
Net Weight: 126kg
Alarm: Audible/visible
Power:400W
Power consumption: 7.3KWh/24h
Noise:60dBA
Package Size: 1350*875*1140mm

DW-86W118



Item Name: Medical Deep Freezer
Temperature Range: -40 to-86° C
Type: Horizontal
Capacity: 58L
Voltage: 220V/50Hz
External Size: 670*765*1025mm
Internal Size: 410*410*385mm
Cooling System: Direct Cold
Compressor: SECOP
Temperature Controller: LED Display
Net Weight: 83kg
Alarm: Audible/visible
Power:380W
Power consumption: 5.9KWh/24h
Noise:60dBA
Package Size: 750*845*1175mm

DW-86W058



Item Name: Medical Deep Freezer
Temperature Range: -40 to-86° C
Type: Horizontal
Capacity: 258L
Voltage: 220V/50Hz
External Size: 1510*895*1090mm
Internal Size: 780*500*660mm
Cooling System: Direct Cold
Compressor: SECOP
Temperature Controller: LED Display
Net Weight: 162kg
Alarm: Audible/visible
Power:500W
Power consumption: 8.8KWh/24h
Noise:60dBA
Package Size: 1590*975*1240mm

DW-86W258

-86°C ULT FREEZERS



Item Name: Medical Deep Freezer
Temperature Range: -40 to -86° C
Type: Horizontal
Capacity: 358L
Voltage: 220V/50Hz
External Size: 1810*895*1090mm
Internal Size: 1080*500*660mm
Cooling System: Direct Cold
Compressor: SECOP
Temperature Controller: LED Display
Net Weight: 180kg
Alarm: Audible/visible
Power: 510W
Power consumption: 9.6KWh/24h
Noise: 60dBA
Package Size: 1890*975*1240mm

DW-86W358



Item Name: Medical Deep Freezer
Temperature Range: -40 to -86° C
Type: Horizontal
Capacity: 458L
Voltage: 220V/50Hz
External Size: 2115*895*1095mm
Internal Size: 1380*500*660mm
Cooling System: Direct Cold
Compressor: SECOP
Temperature Controller: LED Display
Net Weight: 207kg
Alarm: Audible/visible
Power: 530W
Power consumption: 10.2KWh/24h
Noise: 60dBA
Package Size: 2190*975*1240mm

DW-86W458



HCD-25/40/60L200

Storage Capacity(L): Refrigerator: 120L Freezer: 80L
 Internal Size(W*D*H)mm:
 Refrigerator: 530*490*520mm
 Freezer: 420*430*410mm
 External Size(W*D*H)mm; 620*650*1680mm
 Power Supply(V/HZ): 220V/50Hz
 Power(W): 450/480/500W
 Power Consumption(KWh/24h): 6.0/6.5/6.8KWh/24h
 Temperature Range:0~-25°C/-15~-40°C/-25~-60°C
 Ambient Temperature: 16-32°C
 Shelves: Refrigerator: 2pcs Freezer: 1pc
 Climate Type: N
 Controller: Microprocessor
 Display: LED Digital
 Cooling Method:
 Refrigerator: Air Cooling Freezer: Direct Cold
 Defrosting:
 Refrigerator: Auto Defrosting Freezer: Manual
 Refrigerant:
 Refrigerator: R134a Freezer: R404 or Mixed
 Package Size(W*D*H)mm: 690*740*1730mm
 NW/GW(Kgs): 112/138kg
 External Material: Galvanized Sheet Sprayed
 Inner Material: 304 Stainless Steel
 Alarm Method: Sound-Light



HCD-25/40/60L400

Storage Capacity(L): Refrigerator: 280L Freezer: 120L
 Internal Size(W*D*H)mm:
 Refrigerator: 660*610*800mm
 Freezer: 553*524*425mm
 External Size(W*D*H)mm; 750*715*1980mm
 Power Supply(V/HZ): 220V/50Hz
 Power(W): 600/700/750W
 Power Consumption(KWh/24h): 8.5/9.0/10.5KWh/24h
 Temperature Range:0~-25°C/-15~-40°C/-25~-60°C
 Ambient Temperature: 16-32°C
 Shelves: Refrigerator: 2pcs Freezer: 1pc
 Climate Type: N
 Controller: Microprocessor
 Display: LED Digital
 Cooling Method:
 Refrigerator: Air Cooling Freezer: Direct Cold
 Defrosting:
 Refrigerator: Auto Defrosting Freezer: Manual
 Refrigerant:
 Refrigerator: R134a Freezer: R404 or Mixed
 Package Size(W*D*H)mm: 820*805*2130mm
 NW/GW(Kgs): 132/160kg
 External Material: Galvanized Sheet Sprayed
 Inner Material: 304 Stainless Steel
 Alarm Method: Sound-Light